

MPT 400/8 V



MPT 250/5

MP 120/5 A

MP 80/3



per caratteristiche-varianti costruttive pag. 80 - for features schedule-constructural variances pag. 80

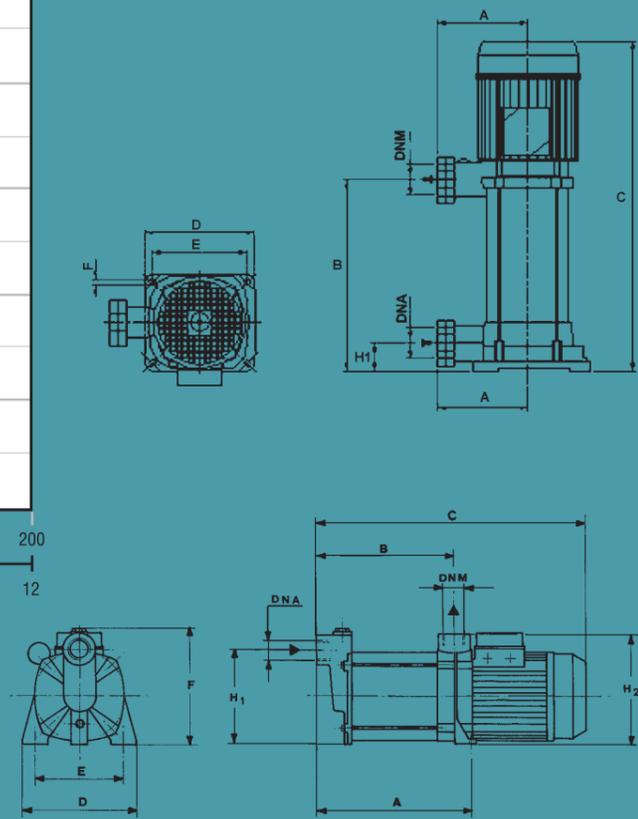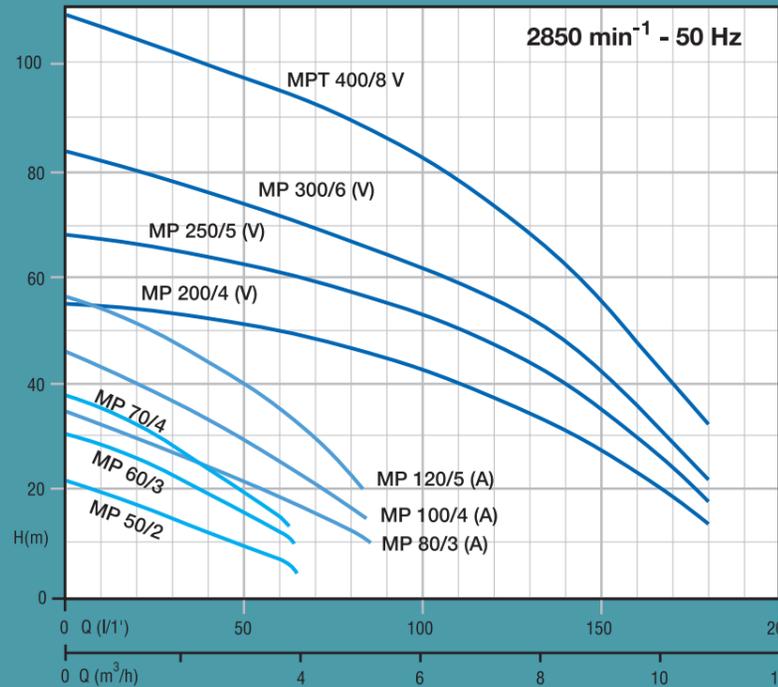


南京亚勤科贸有限公司

TIPO - TYPE		P ₂ nom.		P ₁ (kW) max.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal										
1 ~	3 ~					1 ~	3 ~	H = Prevalenza manometrica totale in m. C.A. Hauteur manométrique totale en m. - Total head in meters w.c. Förderhöhe m. - Altura de impulsión manométrica total en m.										
230 V - 50 Hz	230/400 V - 50 Hz	HP	kW	1 ~	3 ~	1 x 230 V	3 x 400 V	m ³ /h	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	
								l/s	0	20	40	60	80	100	120	140	160	
MP 50/2	MPT 50/2	0.5	0.37	0.51	0.5	2.4	1	20.5	17.5	13	7.5							
MP 60/3	MPT 60/3	0.6	0.45	0.65	0.65	3.1	1.1	30.1	26	19.5	11.5							
MP 70/4	MPT 70/4	0.7	0.51	0.83	0.85	3.8	1.6	38	32	24.5	14.5							
MP 80/3	MPT 80/3	0.8	0.59	0.83	0.88	3.8	1.6	34	29.5	25	18.5	13						
MP 100/4	MPT 100/4	1	0.74	1.07	1.1	5	1.9	45.5	40	34	26	18						
MP 120/5	MPT 120/5	1.2	0.88	1.27	1.33	6.1	2.3	56	51.5	44.5	35	22						
MP 80/3 A	MPT 80/3 A	0.8	0.59	0.83	0.88	3.8	1.6	34	29.5	25	18.5	13						
MP 100/4 A	MPT 100/4 A	1	0.74	1.07	1.1	5	1.9	45.5	40	34	26	18						
MP 120/5 A	MPT 120/5 A	1.2	0.88	1.27	1.33	6.1	2.3	56	51.5	44.5	35	22						
MP 200/4	MPT 200/4	2	1.5	1.95	1.8	9.7	3.2	55	53.5	52	48.5	46.5	42.5	38	31.5	23		
MP 250/5	MPT 250/5	2.5	1.85	2.45	2.35	11	3.8	68.5	67	64.5	62	58.5	53.5	48	39	30		
MP 300/6	MPT 300/6	3	2.2	2.8	2.6	13.2	4.5	82.5	80	77	71.5	70	61.5	57	47.5	36		
MP 200/4 V	MPT 200/4 V	2	1.5	1.95	1.8	9.7	3.2	55	53.5	52	48.5	46.5	42.5	38	31.5	23		
MP 250/5 V	MPT 250/5 V	2.5	1.85	2.45	2.35	11	3.8	68.5	67	64.5	62	58.5	53.5	48	39	30		
MP 300/6 V	MPT 300/6 V	3	2.2	2.8	2.6	13.2	4.5	82.5	80	77	72.5	70	61.5	57	47.5	36		
-	MPT 400/8 V	4	3	-	3.5	-	6.1	108	104	99.5	95.5	90	83	73	61	48		

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Masstabelle mm Dimensiones mm						Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones emballaje mm					Peso Poids Weight Gewicht Peso		
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	kg
MP 50/2	170	146	330	180	140	185	150	175	1" G	1" G	440	200	215	8.9
MP 60/3	195	170	355	180	140	185	150	175	1" G	1" G	440	200	215	9.8
MP 70/4	220	194	380	180	140	185	150	175	1" G	1" G	440	200	215	10.5
MP 80/3	195	170	375	180	140	185	150	175	1" G	1" G	440	200	215	12.1
MP 100/4	220	194	400	180	140	185	150	175	1" G	1" G	440	200	215	13.7
MP 120/5	245	218	425	180	140	185	150	175	1" G	1" G	440	200	215	14
MP 80/3 A	245	224	425	180	140	185	150	175	1" G	1" G	440	200	215	14
MP 100/4 A	270	240	450	180	140	185	150	175	1" G	1" G	500	200	215	15.7
MP 120/5 A	295	264	475	180	140	185	150	175	1" G	1" G	500	200	215	16
MP 200/4	260	220	465	197	150	227	185	225	1" 1/4 G	1" G	540	225	270	21.3
MP 250/5	290	250	495	197	150	227	185	225	1" 1/4 G	1" G	540	225	270	22.8
MP 300/6	320	280	525	197	150	227	185	225	1" 1/4 G	1" G	610	225	270	23.5
MP 200/4 V	159	245	485	175	147	10.5	42	-	1" 1/4 G	1" G	570	250	270	25.3
MP 250/5 V	159	275	512	175	147	10.5	42	-	1" 1/4 G	1" G	570	250	270	26.8
MP 300/6 V	159	305	539	175	147	10.5	42	-	1" 1/4 G	1" G	570	250	270	27.5
MPT 400/8 V	159	365	605	175	147	10.5	42	-	1" 1/4 G	1" G	650	250	280	31.2

- serie MP
elettropompe centrifughe multicellulari
- serie MP
electropompes centrifuges multicellulaires
- serie MP
multistage electric pumps
- baureihe MP
Mehrstufige Kreiselpumpen in Blockausführung
- serie MP
electrobombas centrifugas multicelulares

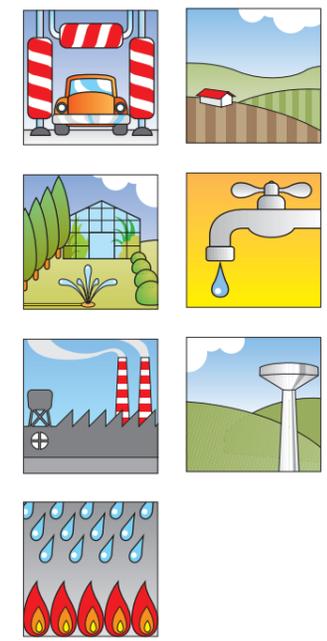

Dimensioni imballo
Dimensions d'emballage
Packing dimensions
Verpackungsmasse
Dimensiones imballaje

南京亚勤科贸有限公司
http://www.chinayaqin.com
Tel:025-57045861
Fax:025-57055861
24小时服务热线: 025-51968090

MULTI GIRANTE multistage electric pumps